

Computer Network Architecture

Lecture 2:

Fundamental of Network

Assistant Teacher Suad Abdulelah Alasadi

Internet and Intranet

Intranet: An intranet is a private network that is contained within an enterprise. It may consist of many interlinked local area networks and also use leased lines in the wide area network. It is **a private version of the Internet.**

Internet: Interconnection of Networks: Internetwork is a worldwide system of computer networks - a network of networks in which users at any one computer can, if they have permission, get information from any other computer (and sometimes talk directly to users at other computers).

Data Flow

- **Communication** between two devices can be *Simplex, Half-Duplex, or Full-Duplex:*

❖ Simplex

In simplex mode, the communication is unidirectional, as on a one-way street. Only one of the two devices on a link can transmit; the other can only receive. For example, **Keyboards**.

❖ Half -Duplex

With half-duplex, communications happen in both directions, but in only one direction at a time. When two computers communicate using half-duplex, one computer sends a signal and the other receives; then, at some point, they switch sending and receiving roles. For example, push-to-talk technology (**walkie-talkie**).

Data Flow (Cont.)


❖ Full-duplex

Full-duplex allows communication in both directions simultaneously. Both stations can send and receive signals at the same time. Full-duplex communications are similar to a **telephone call**, in which both people can talk simultaneously.


Data Flow (Cont.)



a. Simplex

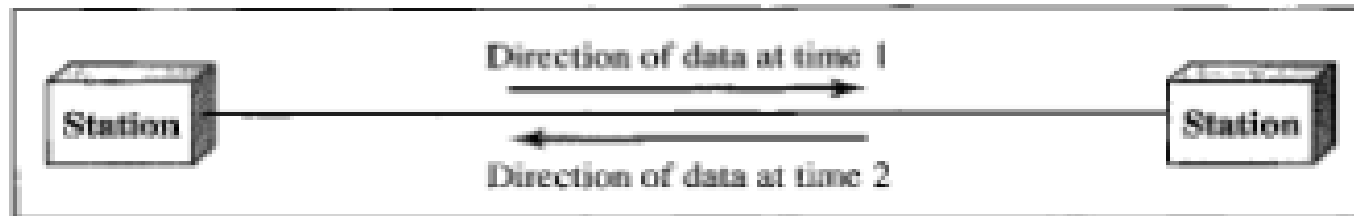

b. Half-duplex

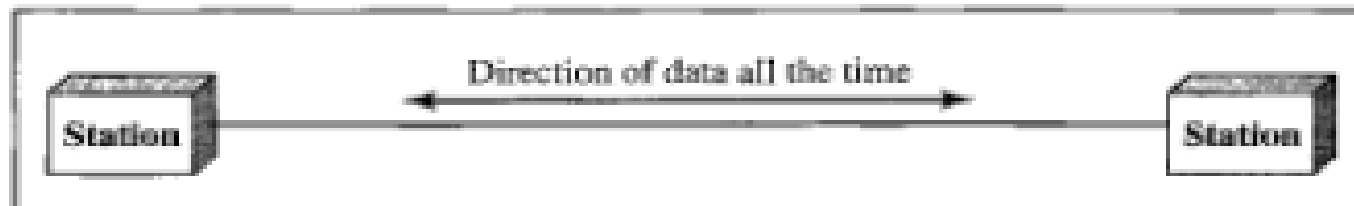

c. Full-duplex

Server, Workstation, and Client role in networking

- **Server**

A core component of the network, It **provides resources** to the clients on the network (“serves” them, in other words). Servers are typically powerful computers that run the software that controls and maintains the network. This software is known as the network operating system.

- A server computer provides a link to the resources necessary to perform any task.

- for example **Print Server** (Controls and manages one or more printers for the network).


- **Client**

A *client* is any network entity that can **request resources** from the network. Client computers also depends primarily on the central server for processing activities.

Server, Workstation, and Client role in networking (Cont.)

- *workstation*

Normally refers to any computer that is connected to the network and used by an individual to do work.

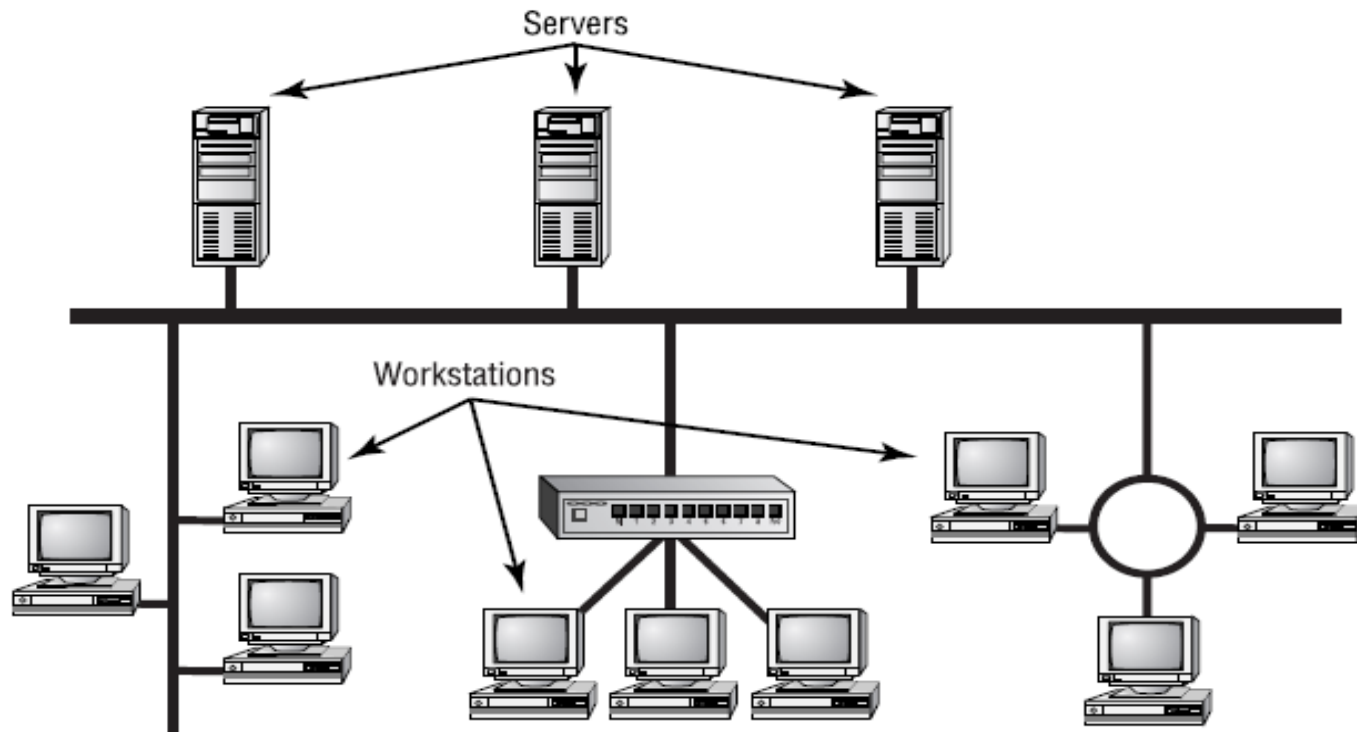

Assistant Teacher **Suad Abdulelah Alasadi**

(Peer-to-Peer) and (Client / Server) Architecture


- As discuss previous, the purpose of networking is to share resources, but we don't know how this is accomplished?

-This depends on the **architecture of the network operating system software**. The two most common network types are **peer-to-peer** and **client/server**.

➤ Peer-to-Peer Architecture

In peer-to-peer networks, the connected computers have no centralized authority. From an authority viewpoint, all of these computers are equal. Each computer in a peer-to-peer network can *be both a client that requests resources and a server that provides resources*. There is no assigned role for any particular device, and each of the devices usually runs similar software.

Peer-to-Peer Architecture

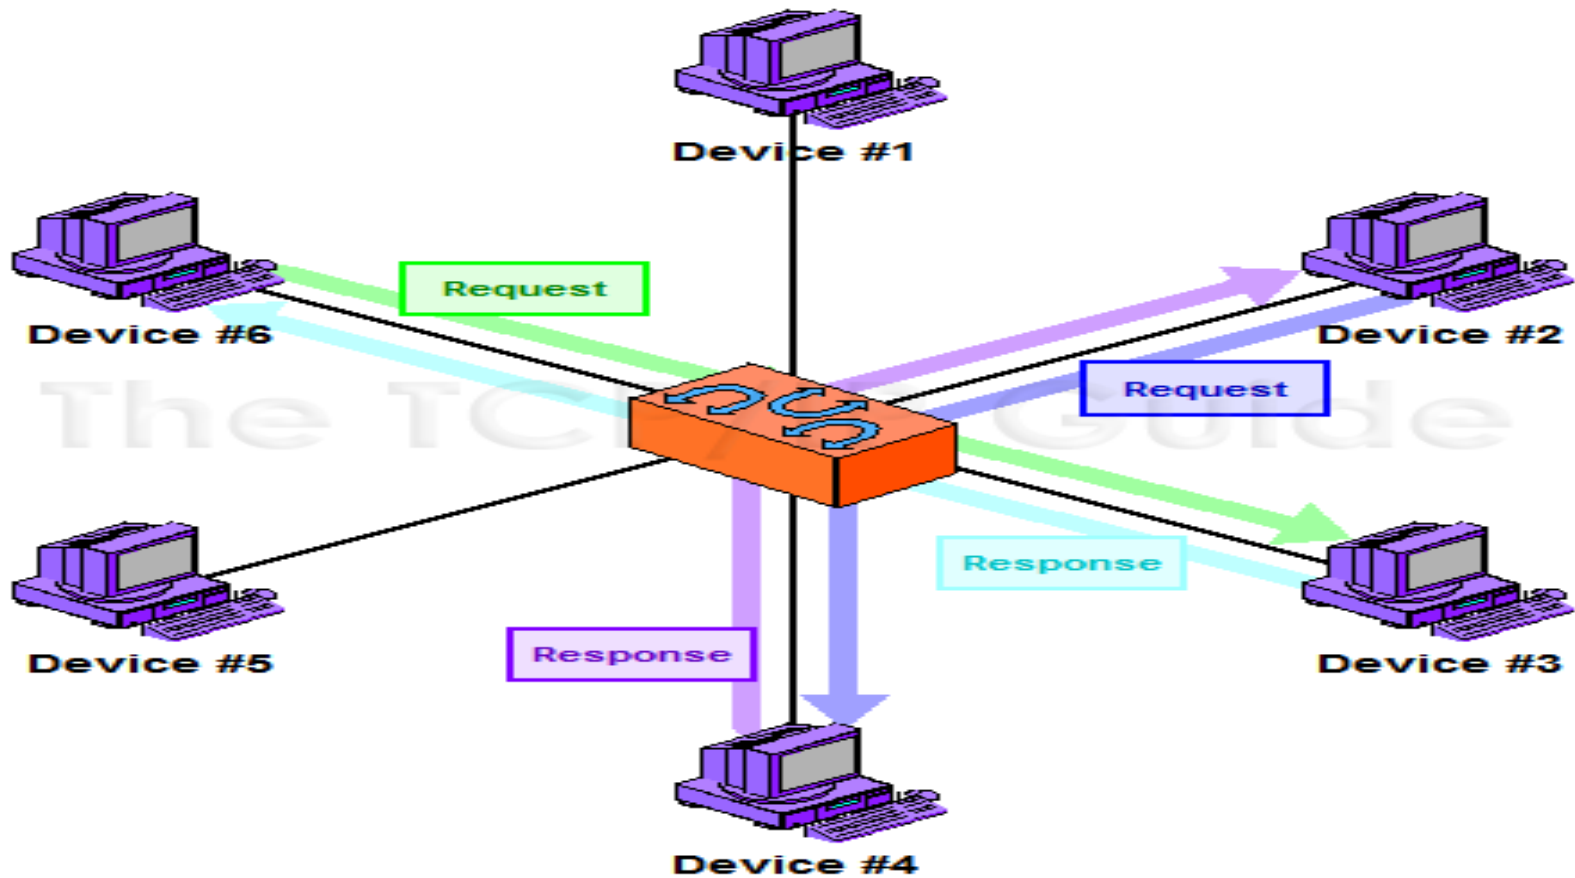


Assistant Teacher Suad Abdulelah Alasadi

Client/Server Architecture

➤ Client/Server Architecture

In this design, a client/server network uses a network operating system designed to manage the entire network from a **centralized point**, which is **the server**. **Clients** make requests of the server, and the server responds with the information or access to a resource.

Client/Server Architecture(Cont.)

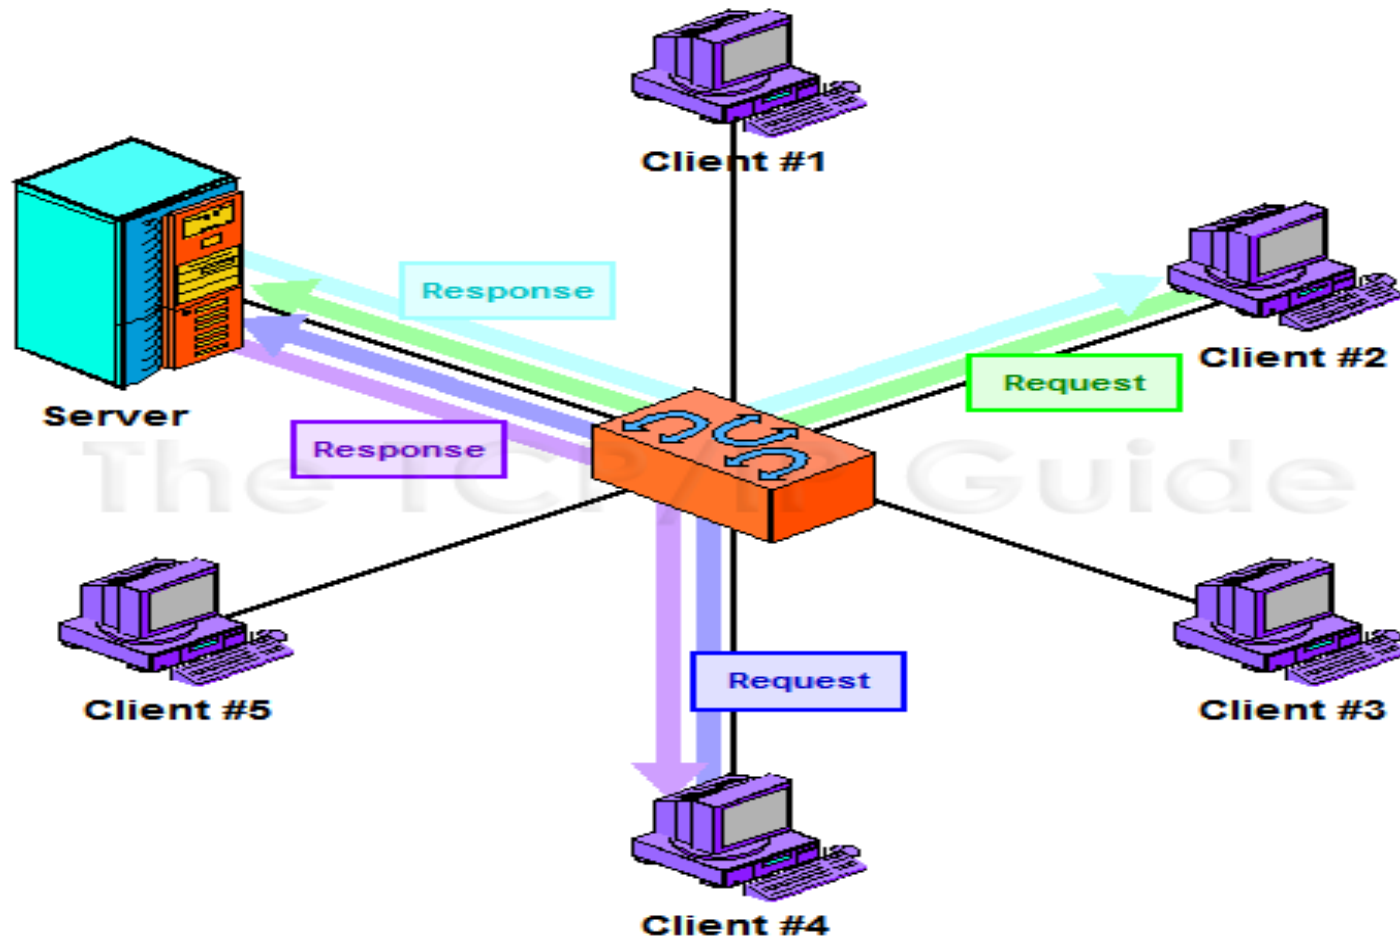

Assistant Teacher Suad Abdulelah Alasadi

Network Topology

- A **topology** is basically a map of a network. The physical topology of a network describes the layout of the cables and workstations and the location of all network components. Topologies can be either physical or logical.

--Physical topologies

The term physical topology refers to the way in which a network is laid out physically. Two or more devices connect to a link; two or more links form a topology.

--Logical topologies describe how the network messages travel.

- The cables or connections in a physical topology are often referred to as **network media** (or **physical media**).

Network Topology (Cont.)

- **There are four famous type of topology:**
 - **Bus** (can be both logical and physical)
 - **Star** (physical only)
 - **Ring** (can be both logical and physical)
 - **Mesh** (can be both logical and physical)

Network Topology (Cont.)

- **Bus Topology**

A bus is the simplest physical topology. It consists of a **single cable** that runs to every workstation.

**This topology uses the least amount of cabling, but also covers the shortest amount of distance.

**When communicating on a network that uses a bus topology, all computers see the data on the wire.

**With a logical bus topology, messages pass through the trunk, and each workstation checks to see if the message is addressed to itself. If the address of the message matches the workstation's address, the network adapter copies the message to the card's on-board memory.


Network Topology (Cont.)

- **A bus topology has the following characteristics:**
 1. Is simple to install.
 2. Is relatively inexpensive.
 3. Uses less cable than other topologies.

- **The following characteristics describe the con side of a bus topology:**
 1. Is difficult to move and change.
 2. Has little fault tolerance (a single fault can bring down the entire network).
 3. Is difficult to troubleshoot.

Network Topology (Cont.)

Bus Topology

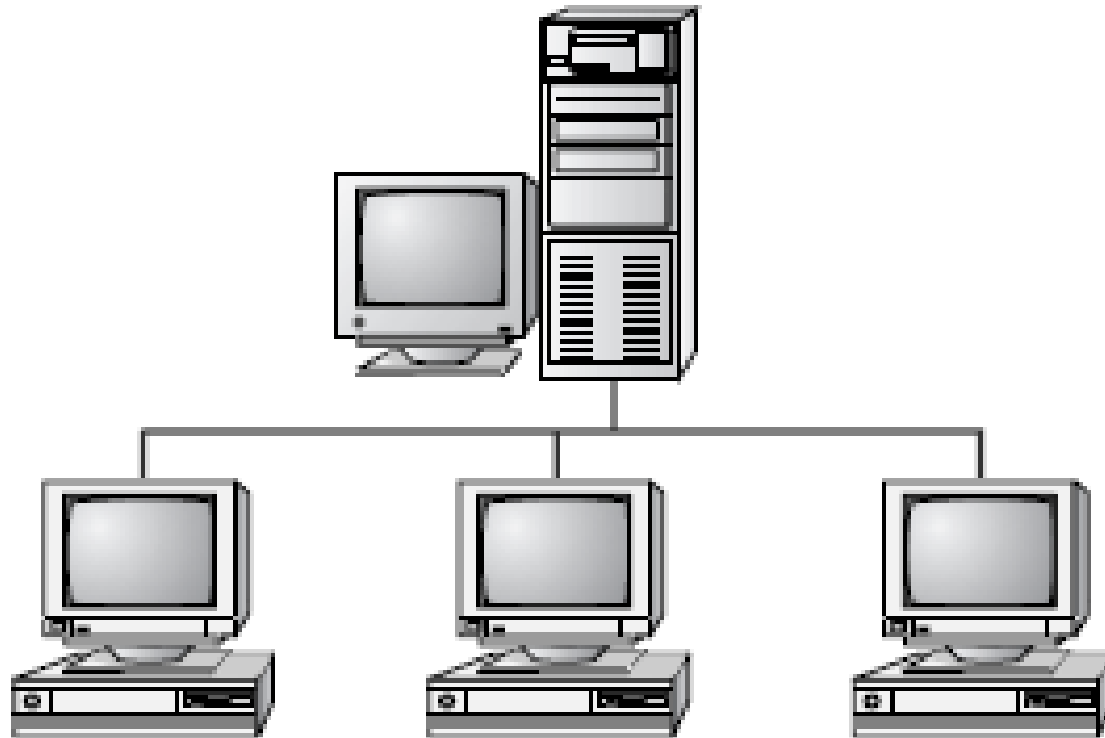

Assistant Teacher Suad Abdulelah Alasadi

Network Topology (Cont.)

- **Star Topology**

A physical star topology branches each network device off a central device called a *hub*, making it very easy to add a new workstation.

--Star topologies are easy to install. A cable is run from each workstation to the hub. The hub is placed in a central location in the office.

--Star topologies are more expensive to install than bus networks, because there are several more cables that need to be installed, plus the cost of the hubs that are needed.

Network Topology (Cont.)

➤ The star topology has advantages:


1. New stations can be added easily and quickly.
2. A single cable failure won't bring down the entire network.
3. It is relatively easy to troubleshoot.

➤ The disadvantages of a star topology include the following:

1. Total installation cost can be higher because of the larger number of cables, but prices are constantly becoming more and more competitive.
2. It has a single point of failure (the hub, or other central device).

Network Topology (Cont.)

Star Topology

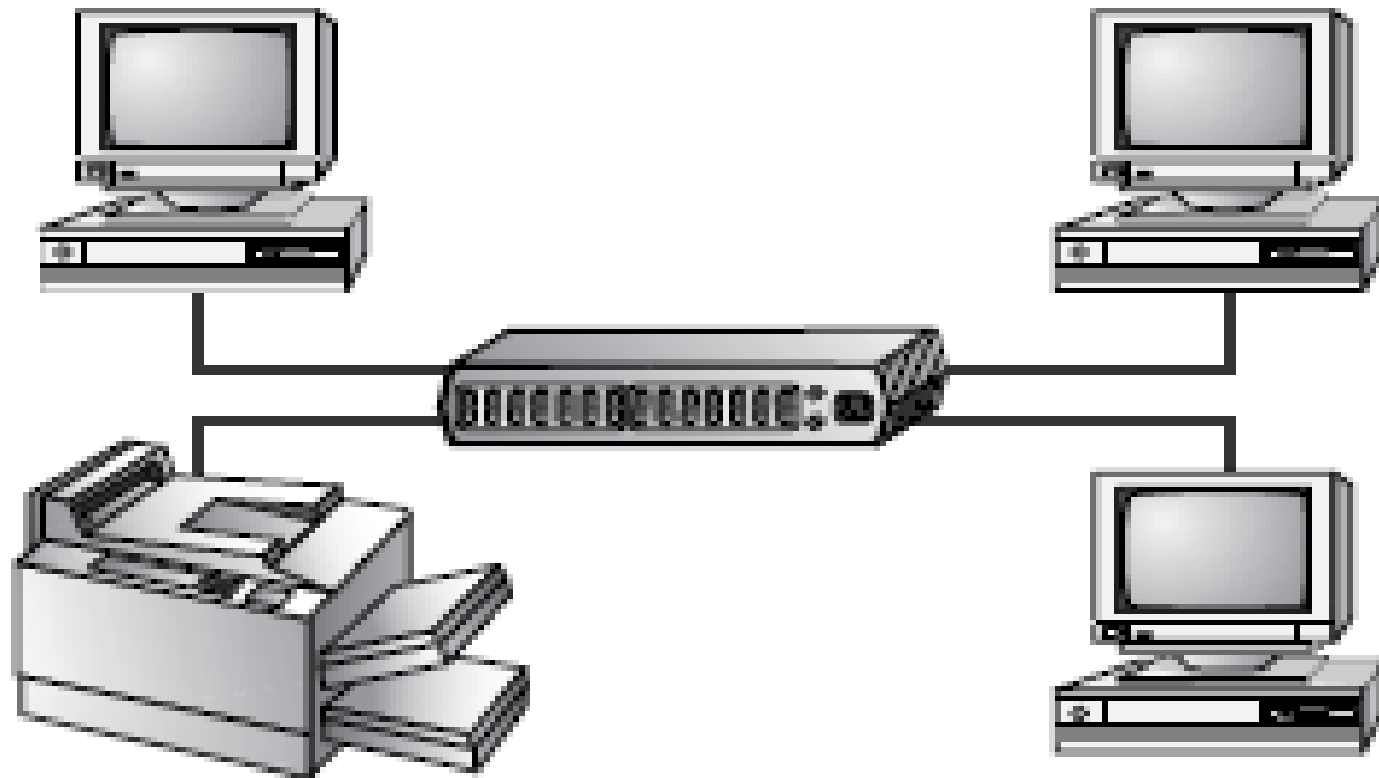

Assistant Teacher Suad Abdulelah Alasadi

Network Topology (Cont.)

- Ring Topology


In this topology, computer is connected directly to two other computers in the network. Data moves down a one-way path from one computer to another. Each entity participating in the ring reads a message, then regenerates it and hands it to its neighbor on a different network cable.

➤ A ring topology has the following characteristics:

1. Expensive, because multiple cables are needed for each workstation.
2. The ring makes it difficult to add or remove new computers.
3. Difficult to reconfigure(the ring topology network will go down if one entity is removed from the ring.).
4. Not fault tolerant. A single cable fault can bring down the entire network.
5. The physical ring topology is seldom used.

Network Topology (Cont.)

Ring Topology

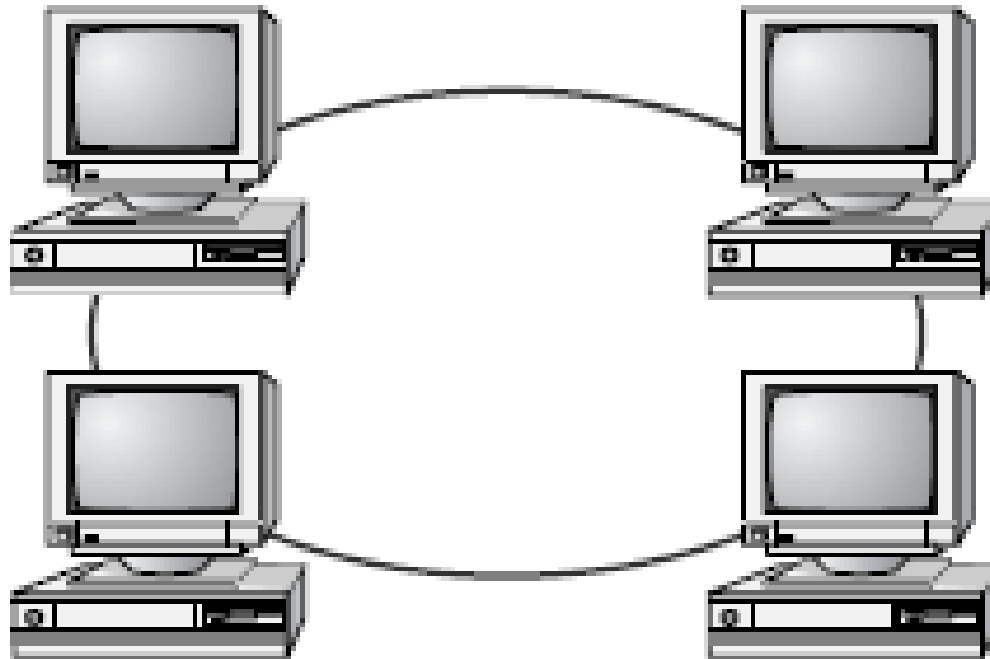

Assistant Teacher Suad Abdulelah Alasadi

Network Topology (Cont.)

- **Mesh Topology**

The *mesh topology* is the simplest **logical topology** in terms of data flow, but it is the most complex in terms of physical design.

In this **physical topology**, each device is connected to every other device. This topology is rarely found in **LANs**, mainly because of the complexity of the cabling.

If there are n computers, there will be $(n * (n-1)) / 2$ cables in the network. For example, if you have five computers in a mesh network, it will use $5 * (5 - 1) / 2$, which equals 10 cables. This complexity is compounded when you add another workstation.


For example, your five-computer, 10-cable network will jump to 15 cables just by adding one more computer. Imagine how the person doing the cabling would feel if you told them you had to cable 50 computers in a mesh network—they'd have to come up with $50 \times (50 - 1) \div 2 = 1225$ cables!

Network Topology (Cont.)

- Because of its **design**, the **physical mesh topology** is very expensive to install and maintain.
- Cables must be run from each device to every other device. The advantage you gain from it is its **high fault tolerance**.
- With a logical mesh topology, however, there will always be a way of getting the data from source to destination. It may not be able to take the direct route, but it can take an alternate, indirect route. It is for this reason that the mesh topology is still found in **WANs** to connect multiple sites across WAN links. It uses devices called *routers* to search multiple routes through the mesh and determine the best path. However, the mesh topology does become inefficient with five or more entities.

Network Topology (Cont.)

Mesh Topology

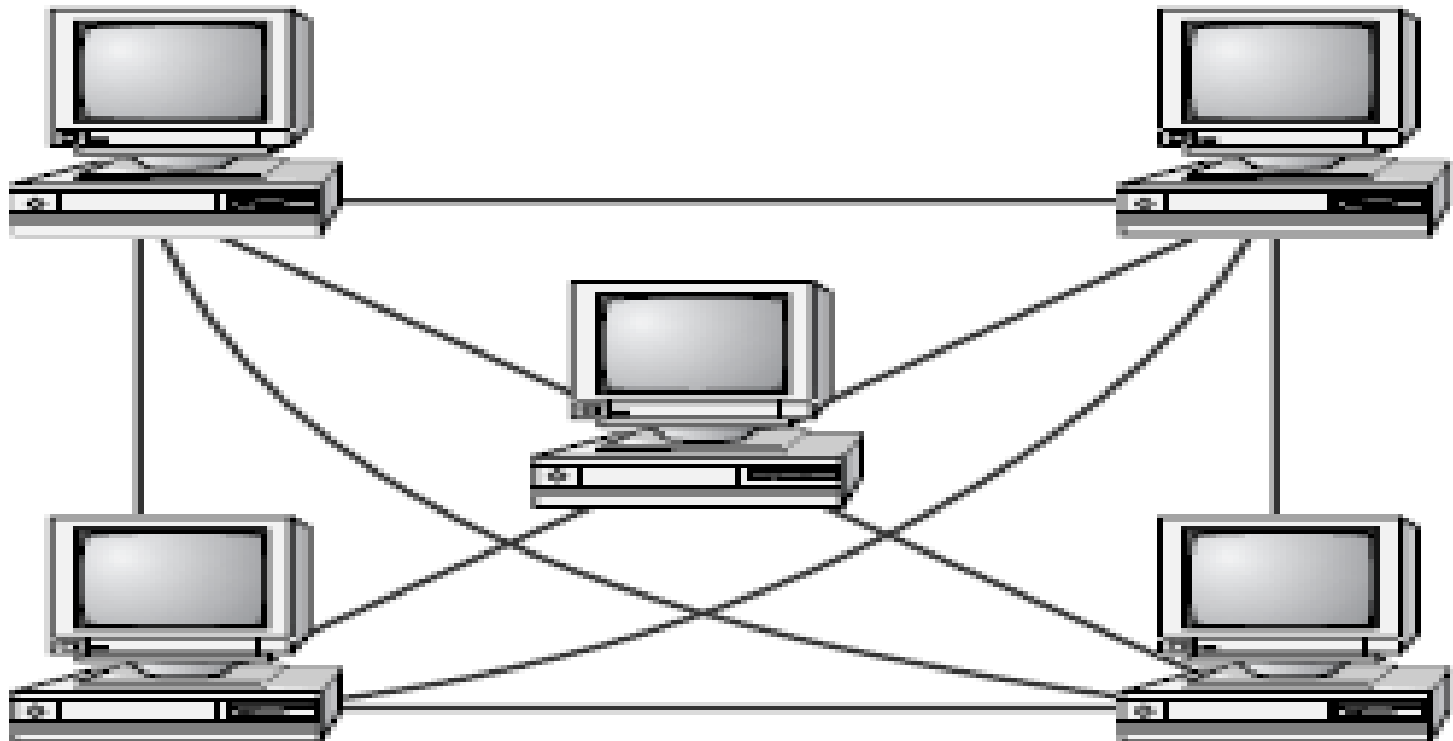

Assistant Teacher Suad Abdulelah Alasadi

Thank You

Assistant Teacher Suad Abdulelah Alasadi